

8

AHSP P/N	LENGTH "A"
NJYYLR-0007	1500±30MM
NJYYLR-0002	2000±40MM
NJYYLR-0008	2500±45MM
NJYYLR-0003	3000±50MM
NJYYLR-0009	3500±55MM
NJYYLR-0004	4000±60MM

3			2		DWG NO. C-NJYYLR-0099		SH 1	REV 1.0
REVISIONS								
ZONE	REV.	ECN NUMBER	DESCRIPTION			BY	DATE	APPROVED
	1.0	MKHN-22031704	NEW RELEASE			M.HUSSAIN	03/17/2022	E.M



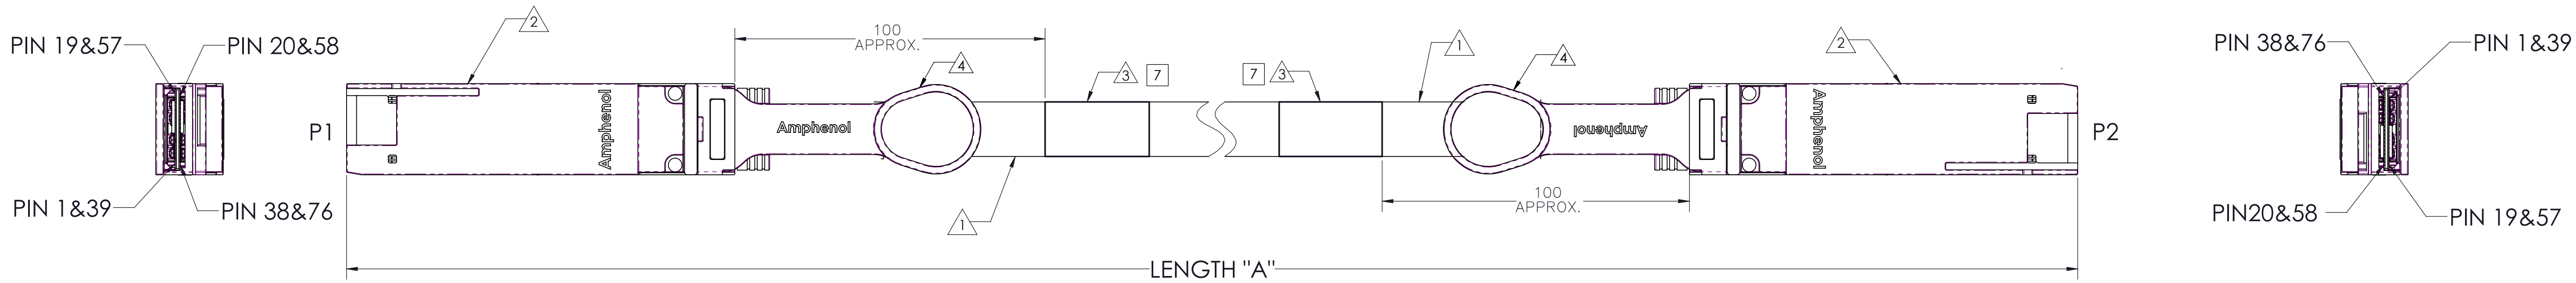


TABLE 2	
ITEM No.	DESCRIPTION
①	30 AWG, 16-PR (ø8.8), VW1 PROTECTIVE PLASTIC NET COVERING WV-1 BLACK
②	PLUG, QSFP-DD, REFERENCE "QSFP-DD MSA"
③	LABEL, WRAPPED – AHSP P/N, REV. DATE CODE, LENGTH, CoO, SERIAL NUMBER & WEEE LOGO AND CE LOGO
④	PULL TAB, BLUE 2718
5	EPROM – REFERENCE QSFP-DD MSA, PAGE A0 ONLY

NOTES:

1. THIS DRAWING IS RESERVED FOR AMPHENOL.
2. ASSEMBLIES SHALL BE COMPLIANT TO QSFP-DD MSA SPECIFICATION.
3. CABLE ASSEMBLIES, COMPONENTS AND SUB-COMPONENTS SHALL BE COMPLIANT TO EU DIRECTIVE 2011/65/EU-ROHS2.
4. CABLE ASSEMBLIES MUST MEET SHIELDING EFFECTIVENESS REQUIREMENTS OF 35DB MINIMUM FROM 1-10GHZ AND 30DB FROM 10-18 GHZ.
5. PACKAGE COMPLETED ASSY IN AN APPROPRIATELY SIZED ESD BAG.
6. UL LABEL MUST BE ON SHIPPING CARTON PER SUBJECT 764 OF THE UL COMPONENT WIRING HARNESS (ZPFW2) FILE #E86140. CSA LABEL MUST BE ON SHIPPING CARTON.

7 LENGTHS LESS THAN 1.0 METERS ONLY REQUIRE ONE LABEL PLACED ON P1 END.

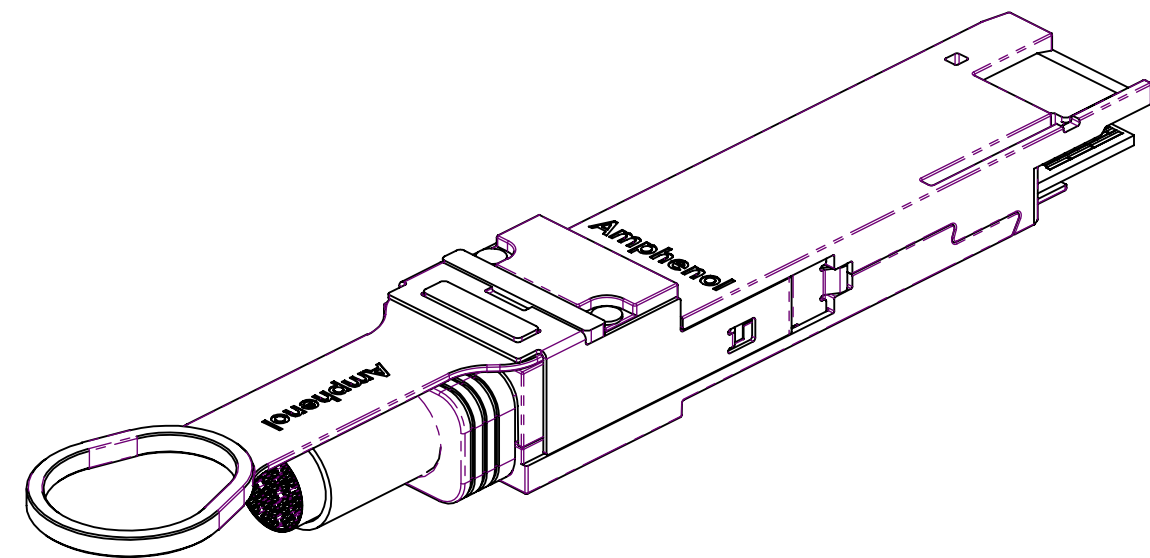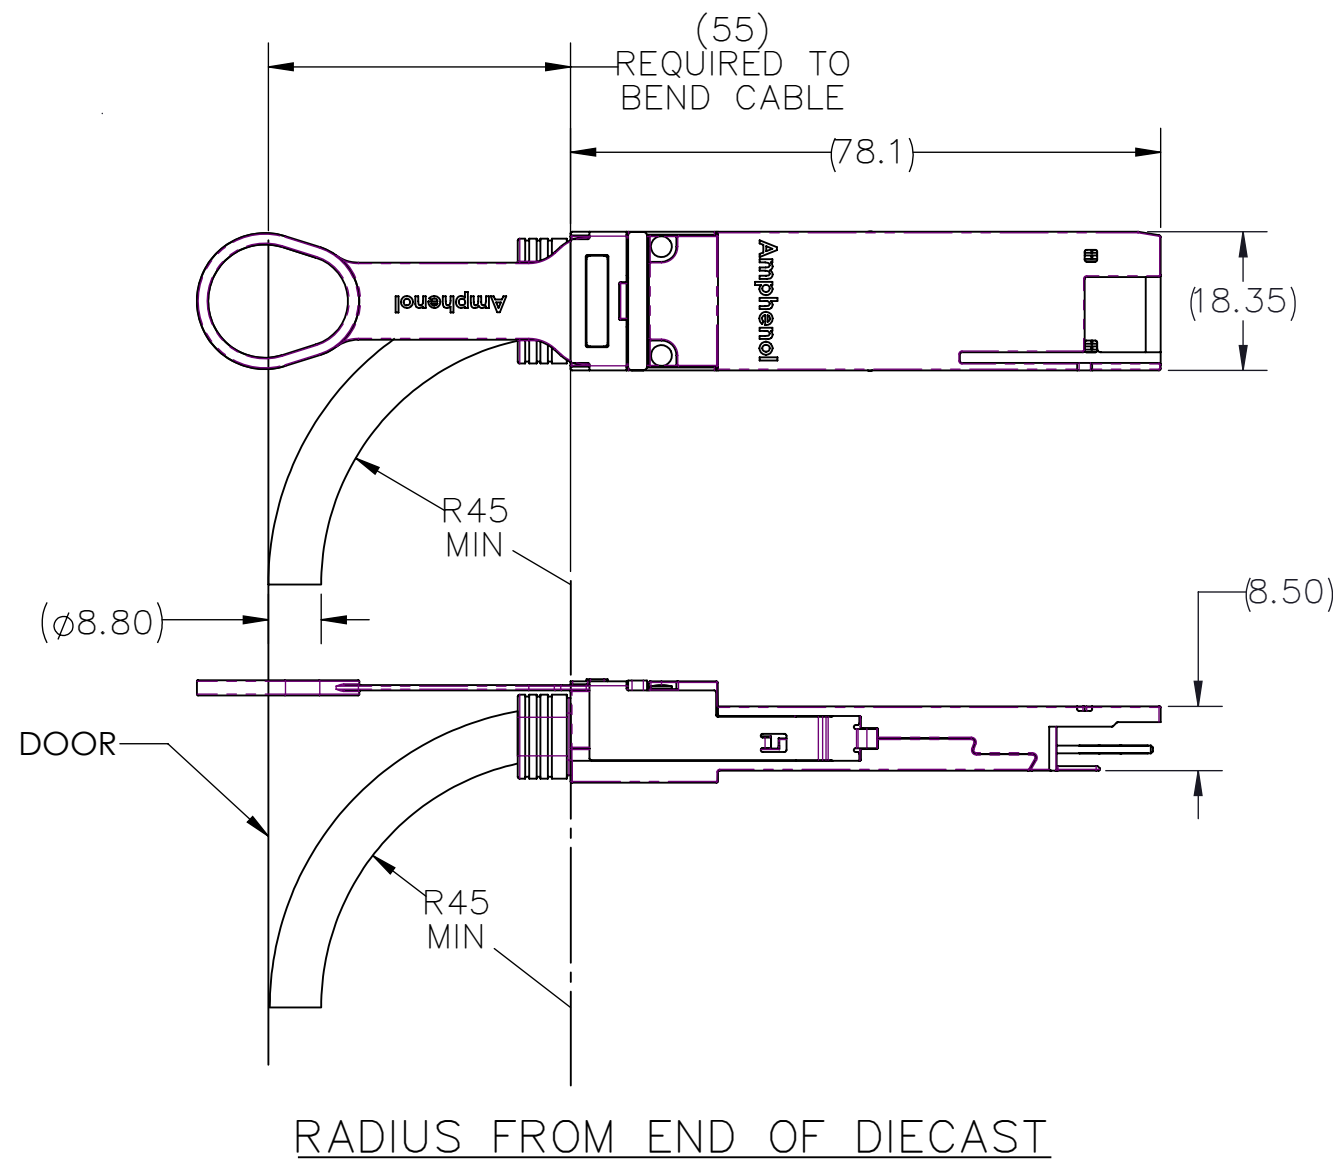

ISOMETRIC VIEW
SCALE: 3:2

TOLERANCES		DWG	02/16/2022		Amphenol AHSF A Division of Amphenol Corporation 200 Innovative Way, Suite 201, Nashua, N.H. 03062 (603) 879-3000
0.0	± 0.1	CHK	02/16/2022		
0.00	± 0.08		M.HUSSAIN		
0.000	± -	APVD	03/17/2022		
ANGLES	± 1.0°		E.M		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM					
CUSTOMER USE DRAWING					
TITLE					CABLE ASSY, QSFP-DD 112G 100Ω, 30AWG, ACTIVE LINEAR
PART NO.					SEE TABLE 1 REV N/A
DRAWING NO.					C-NJYYLR-0099 REV 1.0
SIZE D		SCALE 2:1		SHEET 1 OF 2	

